

TECHNICAL FABRICS BY THE ROLL

NONWOVEN POLYIMIDE (P84®)

ENHANCE FILTER PERFORMANCE

An excellent choice in demanding industrial air filtration applications where high temperatures are present.

KEY BENEFITS



HIGHER FILTRATION EFFICIENCY

P84®'s multilobal construction increases filtration surface area, improving efficiency.



LONG SERVICE LIFE

High tensile strength means it can withstand abrasion in harsh environments.



NON- FLAMMABLE

An outstanding solution for industrial air filtration

480°F

HIGH- TEMPERATURE RESISTANT


Supports applications with operating temperatures up to 480°F (250°C).

FEATURES

- High-temperature stability.
- Enhanced filtration performance.
- Fiber's unique multi-lobal structure offers the highest surface area for filtration.
- Improve dust capture on the surface.
- Outstanding solution for industrial air filtration.
- Reduce maintenance and operating costs.
- Lower operating costs in industrial air filtration.
- 100% virgin premium fibers
- Quality assurance under the strictest protocols to ASTM standards.

OPTIONS

- Water Repellent Treatment
- Oil Repellent Treatment
- EPTFE Membrane
- Calendering
- Singeing
- Heat Setting
- Slitting
- Sewing
- Scrim
- Welding

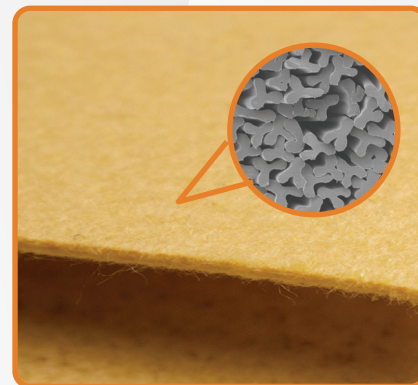

APPLICATIONS

- Cement
- Waste-To-Energy
- Energy From Coal and Biomass
- Metallurgical Processing

NONWOVEN POLYIMIDE (P84®)

FABRIC PROPERTIES

	100% P84	P84® SAW	P84® SP2	P84® SLC
Tensile Strength	Very Good	Very Good	Very Good	Very Good
Abrasion Resistance	Good	Good	Very Good	Good
Acid Resistance	Good	Good	Very Good	Good
Alkali Resistance	Good	Good	Good	Good
Oxidation Resistance	Good	Good	Good	Good
Operating Temperature	482°F (285 °C)	482°F (285 °C)	482°F (285 °C)	482°F (285 °C)
Temperature Surges	500°F (260 °C)	500°F (260 °C)	500°F (260 °C)	500°F (260 °C)
Manufactured Weight Range	14 – 28 oz/yd² (475–950 g/m²)	14 – 16 oz/yd² (474.6 – 542.4 g/m²)	14 – 16 oz/yd² (474.6 – 542.4 g/m²)	14 – 16 oz/yd² (474.6 – 542.4 g/m²)
Manufactured Thickness Range	0.08”–0.09” (2.2mm – 2.5mm)	0.08”–0.09” (2.2mm – 2.5mm)	0.08”–0.09” (2.2mm – 2.5mm)	0.08”–0.09” (2.2mm – 2.5mm)
Investment	\$\$\$	\$\$\$\$	\$\$\$\$	\$\$\$\$

• SLC = Single Light One Side Calendar

• SP2 = ePTFE Membrane

• SAW = Single Light One Side + Water Repellent

“Unlock Your Style: Discover the Most Popular Styles and Customize To Make Them Your Own!”

PRODUCT GALLERY



Disclaimer: Information provided by Albarrie on this sales sheet (“Sheet”) is for general information purposes only. All information on the Sheet is provided in good faith, however Albarrie makes no representation or warranty of any kind, express or implied, regarding the accuracy, adequacy, validity, reliability, availability or completeness of any information on the Sheet. Products may not work as advertised or perform differently based on application, operating conditions, and depend on chemical, thermal, and humidity and other factors.

