

**MATERIAL HANDLING
& CONVEYANCE**

DEFENDER™
HEAT FELTS

**HEAT
PROTECTIVE
TAPE**

**PROTECT OR SEAL WITH
NOMEX TAPE**

High heat-protective tape is made from DuPont™ Nomex® fibers developed to protect products or seal in high-heat applications.

KEY BENEFITS



**EXCELLENT
PROTECTION &
NON-MARKING**

Albarrie's Defender™ Series Heat Felts Won't mark your products during conveyance.



**EXCEPTIONAL
SERVICE LIFE**

Improved service life compared to other products on the market.



HIGH DENSITY

Defender™ Series Heat Felts offer more fiber per square inch, giving you a longer-lasting product.



**HIGH-
TEMPERATURE
RESISTANT**

Supports applications with operating temperatures up to 450°F (232°C).

FEATURES

- Provide ultimate protection during high-heat conveyance.
- Longer-lasting product.
- High temperature self-adhesive Pressure-Sensitive Adhesives (PSA) tape.
- Easy to install.
- It is available in slit rolls in four different styles.
- Eliminate contact between Aluminium and steel.
- High abrasion resistance.
- Custom size available

OPTIONS

- Slitting

APPLICATIONS


- High Heat Conveyance
- Age Carts or Racks in Heat Treating
- Seals & Gaskets



HEAT PROTECTIVE TAPE

DESIGN SPECIFICATIONS

Albarrie's design team includes our highly trained and talented Technical Sales Expert and Mechanical Engineer. Together, they work with you to create specialized Defender™ Series Nomex® Tape. Nomex® Felt Tape is highly successful at protecting aluminium from scratching and marking throughout various stages of the extrusion process; thanks to its unique combination of heat protection and durability. With high operating temperatures it is ideal for lining storage racks and age oven carts. The soft yet durable grade of Nomex® felt is inherently fire resistant and capable of withstanding temperatures up to 450°F (232°C). Several different widths are available in stock.

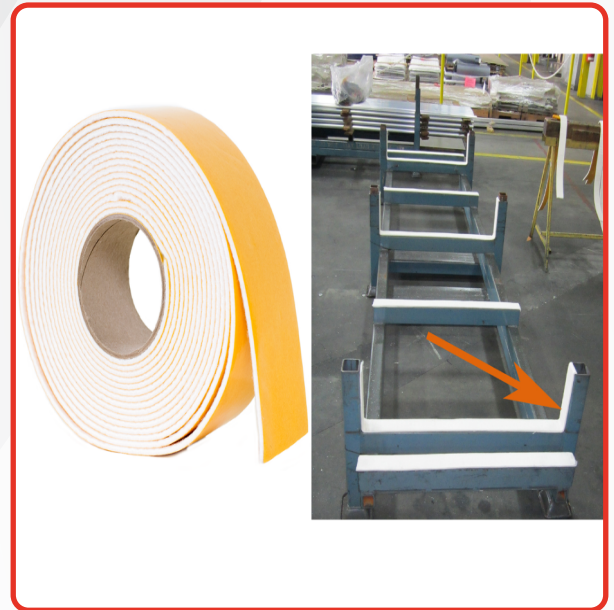

Contact Albarrie's Technical Sales Expert for all your options

DESIGN GALLERY



Disclaimer: Information provided by Albarrie on this sales sheet ("Sheet") is for general information purposes only. All information on the Sheet is provided in good faith, however Albarrie makes no representation or warranty of any kind, express or implied, regarding the accuracy, adequacy, validity, reliability, availability or completeness of any information on the Sheet. Products may not work as advertised or perform differently based on application, operating conditions, and depend on chemical, thermal, and humidity and other factors.

