



**TECHNICAL FABRICS  
BY THE ROLL**

# AFFINITY™

FILTER MEDIA

## NONWOVEN POLYPHENYLENE SULFIDE (PPS)

### PROTECT AGAINST EXTREME HEAT

Polyphenylene Sulfide (PPS) is a high-performing fiber categorized as a thermoplastic polymer known as an engineering plastic.

### KEY BENEFITS



#### FIT FOR MULTIPLE ENVIRONMENTS

Highly suitable for numerous filtration environments.



#### FLAME-RESISTANT

Does not support melting, dripping, or combustion.



#### HIGH-TEMPERATURE RESISTANCE

Supports applications with operating temperatures up to 375°F (190°C)



#### GOOD CHEMICAL RESISTANCE

Won't deteriorate when exposed to various chemicals and industrial solvents.

### FEATURES

- Highly resistant to chemicals
- Inherently flame and hydrolysis resistant
- Works in liquid filtration applications like belt filter presses
- Good mechanical stability
- 100% virgin premium fibers
- Quality assurance under the strictest protocols to ASTM standards.

### OPTIONS

- Oil Repellent Treatment
- PTFE Finish
- ePTFE Membrane
- Heat Setting
- Calendering
- Singeing
- Anti-Static Treatment
- Scrim
- Slitting
- Sewing
- Welding
- Water Repellent Treatment

### APPLICATIONS

- Industrial Air Filtration
- Industrial Liquid Filtration



**FABRIC PROPERTIES**


	<b>100% PPS</b>	<b>PPS SLC</b>	<b>PPS SP2</b>
<b>Tensile Strength</b>	Very Good	Very Good	Very Good
<b>Abrasion Resistance</b>	Good	Good	Good
<b>Acid Resistance</b>	Very Good	Very Good	Very Good
<b>Alkali Resistance</b>	Moderate	Good	Good
<b>Oxidation Resistance</b>	Moderate	Good	Good
<b>Operating Temperature</b>	375°F (190°C)	375°F (190 °C)	375°F (190 °C)
<b>Temperature Surges</b>	400°F (204°C)	400°F (204 °C)	400°F (204°C)
<b>Manufactured Weight Range</b>	10 – 17 oz/yd <sup>2</sup> (339 – 576 g/m <sup>2</sup> )	10 – 17 oz/yd <sup>2</sup> (339 – 576 g/m <sup>2</sup> )	10 – 17 oz/yd <sup>2</sup> (339 – 576 g/m <sup>2</sup> )
<b>Manufactured Thickness Range</b>	0.06”-0.08” (1.7mm – 2.2mm)	0.06”-0.08” (1.7mm – 2.2mm)	0.06”-0.08” (1.7mm – 2.2mm)
<b>Investment</b>	\$\$\$\$	\$\$\$\$\$	\$\$\$\$\$

• SLC = Single Light One Side Calender

• SP2 = ePTFE Membrane

**“Unlock Your Style: Discover the Most Popular Styles and Customize To Make Them Your Own!”**

**PRODUCT GALLERY**

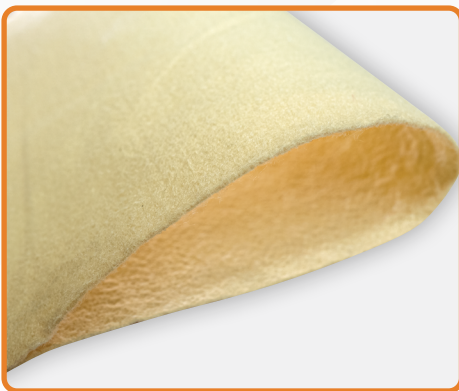

*Disclaimer: Information provided by Albarrie on this sales sheet (“Sheet”) is for general information purposes only. All information on the Sheet is provided in good faith, however Albarrie makes no representation or warranty of any kind, express or implied, regarding the accuracy, adequacy, validity, reliability, availability or completeness of any information on the Sheet. Products may not work as advertised or perform differently based on application, operating conditions, and depend on chemical, thermal, and humidity and other factors.*

