



SECONDARY OIL CONTAINMENT

SORBNSEAL®
AN Albarrie PRODUCT

DON'T LET TRANSFORMER LEAKS COST YOU

Albarrie's transformer secondary oil containment systems use patented mineral oil-reactive self-sealing smart fabric technology, providing a **nearly zero maintenance**.

KEY BENEFITS



NEARLY ZERO MAINTENANCE

No pumps required. Albarrie's smart fabric traps oil, not water.



ENVIRONMENTALLY COMPLIANT

Meets EPA Secondary Containment requirements for SPCC 40 CFR 112.7 and IEEE Std. 980.



BUDGET- FRIENDLY

Reduce installation and maintenance costs compared to other transformer oil containment systems.



FLEXIBLE DESIGN

Designed and installed in greenfield or brownfield applications for all soil types within any geometric configuration.

HOW IT WORKS

Albarrie's Transformer Secondary Oil Containment Systems use patented mineral oil-reactive self-sealing **smart fabric technology** known as **Oilmat**. The smart fabric contains a unique proprietary blend of dense oil-immobilizing polymers, called **Alabsorb**, between two needlepunch nonwoven fabric layers that seal on contact with oil, not water. In a **passive state**, **SorbNSeal®** allows water to pass freely through the **Oilmat** without collection. The **Oilmat** is installed on

the containment floor. When oil comes in contact with the **Oilmat**, it undergoes a chemical change, turning the fabric into an impassable membrane, keeping oil inside the containment area. **SorbNSeal®** includes Albarrie's **Super Absorbent Mat (SAM)**, designed to manage small, chronic leaks without spoiling the containment. It offers an exceptional absorption capability per square inch. SAM absorbs and locks-in oil but remains porous, allowing water to pass through.

OPTIONS

- Above Ground Design
- Below Ground Design
- Concrete Perimeter Wall
- Wick Drain (if required)
- Turn-Key or Supply & Support installation
- Composite Perimeter Walls

FEATURES

- **No more** standing water
- **No more** mechanical moving parts
- **No more** pumping and testing
- **No more** concrete cracks to repair
- Vehicle accessible with full access to the transformer
- Reduced installation costs
- Optimized remediation costs
- Fire-quenching capabilities
- Extended service life
- Significantly decreased risk associated with fire and contamination
- Quick Installation

#FABRICSCHANGING INDUSTRY



SECONDARY OIL CONTAINMENT




APPLICATIONS

- Permanent Substation Transformers
- Multiple Above-Ground Transformers
- Environmentally-Sensitive Areas
- Solar & Wind Farms


SPECIFICATIONS

Type

Fire quench stone gradation requirements	1 ½" to 3" (38 to 75mm) ASHTO #1,2,3,24 ASTM D448-03 Well graded crushed stone with 100% passing the 3" (75mm) sieve and 0% passing the 1 ½" (38mm) sieve. Note: The fire quench stone must meet resistivity and porosity requirements.
Fire quench stone resistivity	≥3000 Ω-m
Fire quench stone porosity (min.)	40%
Fire quench stone type	Basalt, granite, limestone or a compatible stone type. Should not accept soft stones such as sandstone.
Minimum containment depth	18" (0.45m) from top of fire quench stone containment level to top of oilmat.
Maximum containment depth	48" (1.2m) from top of fire quench stone containment level to top of oilmat.
Separation distance from transformer to containment perimeter	For all projects unless specified otherwise by the client: 5 ft (1.5m) or ½ the transformer height whichever is greater.
Containment system oil storage volume requirements (%)	As per client requirements. If no requirements recommend 110% of the volume of the largest oil containing unit plus a 25 year, 24 hour storm. Ensure that each storm volume will drain through system within 4 hours as per US EPA.
Sand Gradation requirements and compaction	All sand layers to be plate tamped in the field with caution being taken when working over the wick drains.

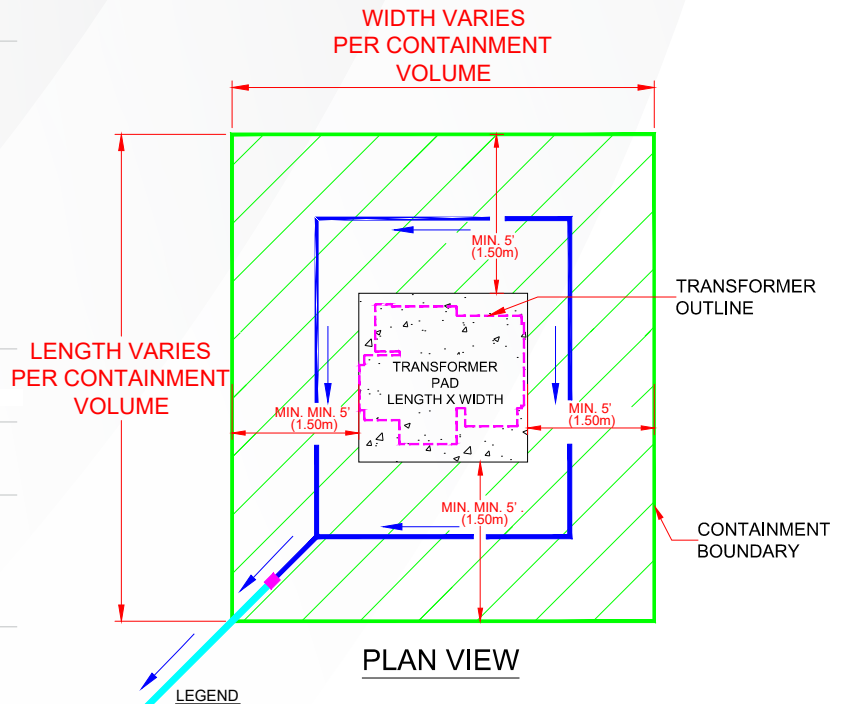

This is not an official engineering drawing and should not be used to scope or bid on projects.

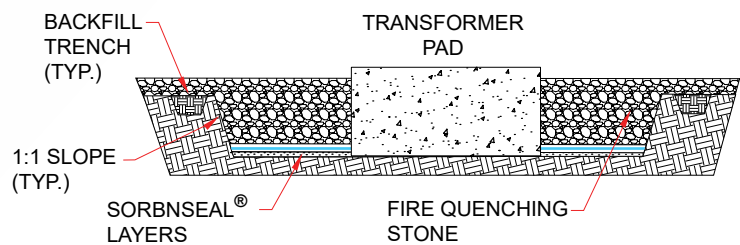

SIDE VIEW

LEGEND



This is not an official engineering drawing and should not be used to scope or bid on projects.

To Learn More Scan Here!

